



ULTRAVIOLET

— vintage vibe —

Controls



1. MODE

Selects the mix configuration of the wet and dry signals:

chorus 50/50 dry/wet for maximum depth and the classic vibe effect

blend 70/30 dry/wet for reduced depth and a milder effect

vibrato only the wet signal for a classic, frequency-dependent, phase-vibrato effect

2. SPEED

Adjusts the rate of the LFO sweep.

Controls - continued

3. INTENSITY

Adjusts the LFO sweep amplitude. At minimum, the LFO amplitude is zero, resulting in a static effect determined by the BIAS setting.

4. BIAS

Sets the center point of the LFO for a range of vibe experiences:

low centered around lower frequencies for a pulsing vibe

mid optimized for a balanced vibe effect

high centered around higher frequencies for a wide ranging vibe effect

5. VOLUME

Adjusts the pedal's output level, up to a 4dB boost at maximum.

6. FOOTSWITCH

Engages and disengages the effect. Red LED indicates the effect is engaged.

Hold to enter Save or to configure an Expression pedal. See the [User Manual](#) for details.

Support

Download the Full User Manual
[strymon.net/support/ultraviolet](https://www.strymon.net/support/ultraviolet)

Questions & Technical Support
support@strymon.net

Rear Panel

1. I/O MODE SELECTOR

mono

mono input, mono output

mono → stereo

mono input, stereo output

stereo

stereo input, stereo output

Stereo I/O requires a TRS adapter or cable. See [User Manual](#) for details.

2. USB

Computer connection for MIDI I/O and firmware updates.

3. INPUT

High impedance TRS, ultra low-noise discrete Class A JFET stereo preamp.

4. OUTPUT

Low impedance TRS stereo output.

5. EXP/MIDI

Can be set to operate in one of four modes: Expression Pedal, Favorite, Tap, or MIDI mode.

See the [User Manual](#) for details.


6. 9VDC

Only use an adapter with the following rating: 9VDC, center-negative, 250mA minimum (sold separately).




Sample Settings


— Jimi From Texas —

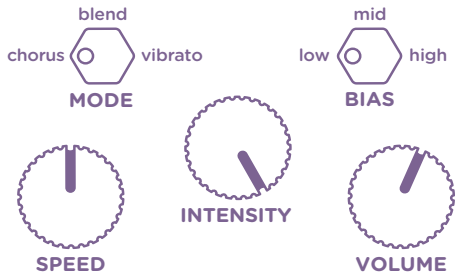


— Clean Arpeggios —

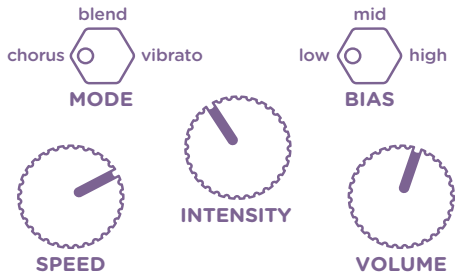

— Rootsy Wobble —

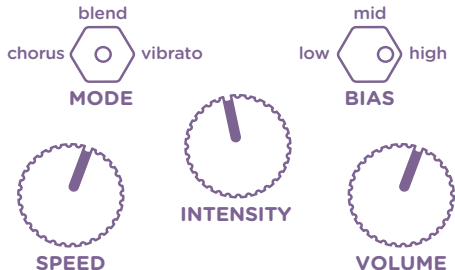

— Marvin's Martian —

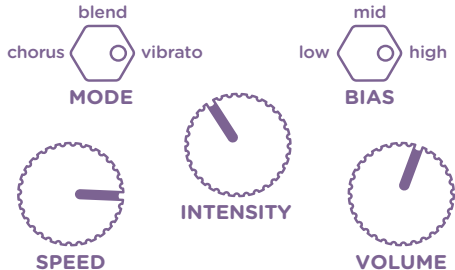

strymon®

Designed and built
in the USA



Rev B